

Fig. 1

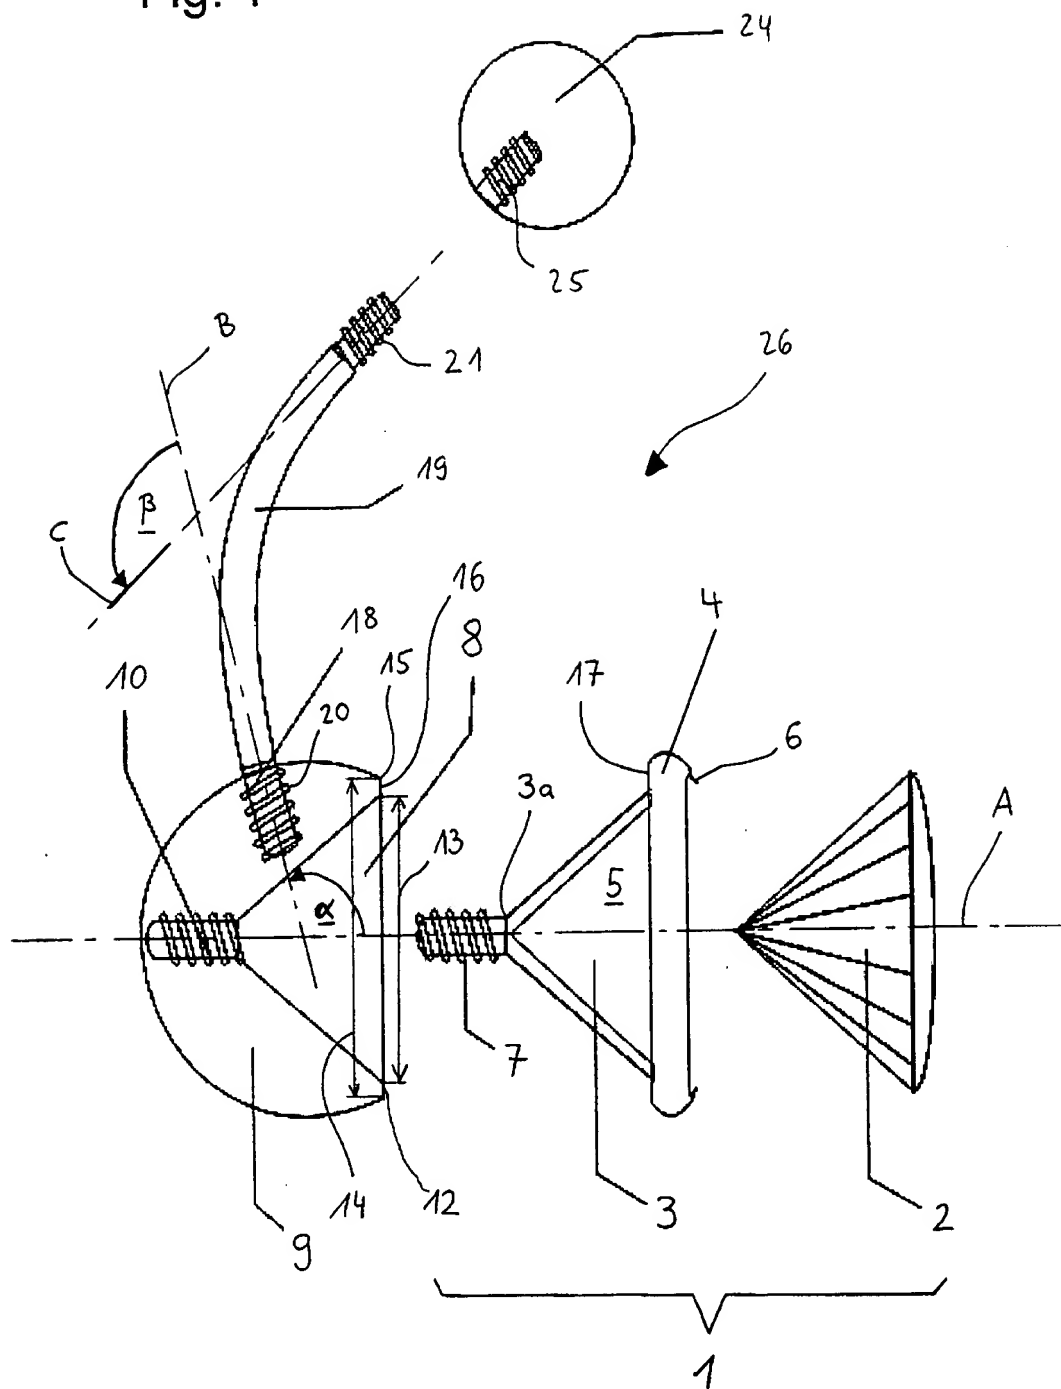


Fig. 2

Fig. 2 is a perspective view of the device 1. It shows a circular base 1 with a segmented inner ring. A vertical shaft 19 extends from the base, topped with a circular cap 24. A spring 26 is located inside the cap 24, positioned above the shaft 19.

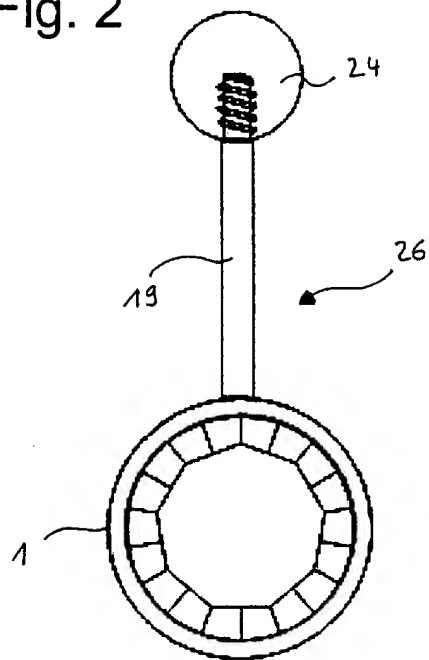


Fig. 3

Fig. 3 is a perspective view of the device 10 in a bent configuration. The device consists of a first spherical member 9 and a second spherical member 24 connected by a flexible member 19. The first spherical member 9 has a conical structure 1 with multiple segments extending from its surface. The second spherical member 24 is shown in a bent position relative to the first member 9. A small triangle 26 is shown near the flexible member 19.



[illegible]

Fig. 5







Fig. 6



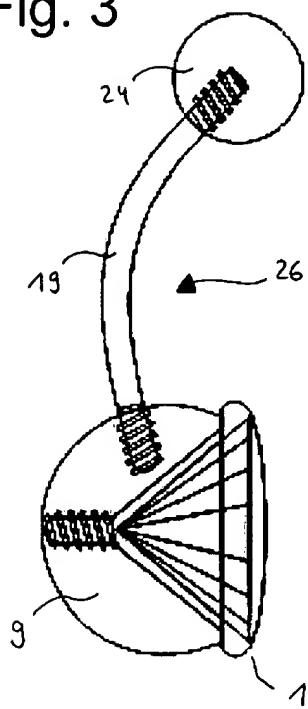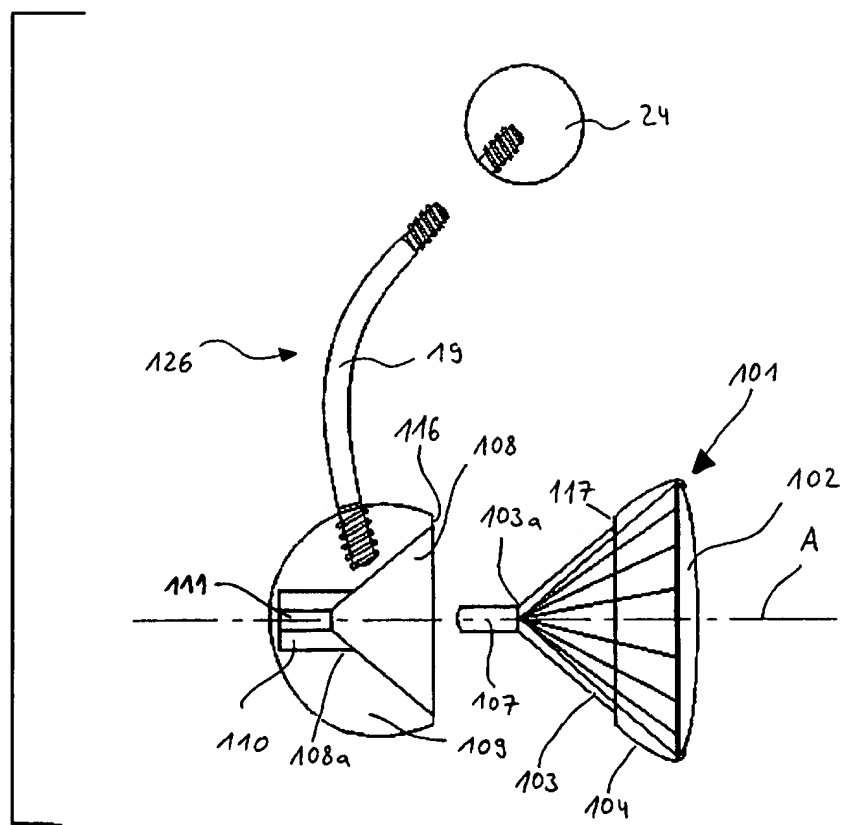

5 / 5

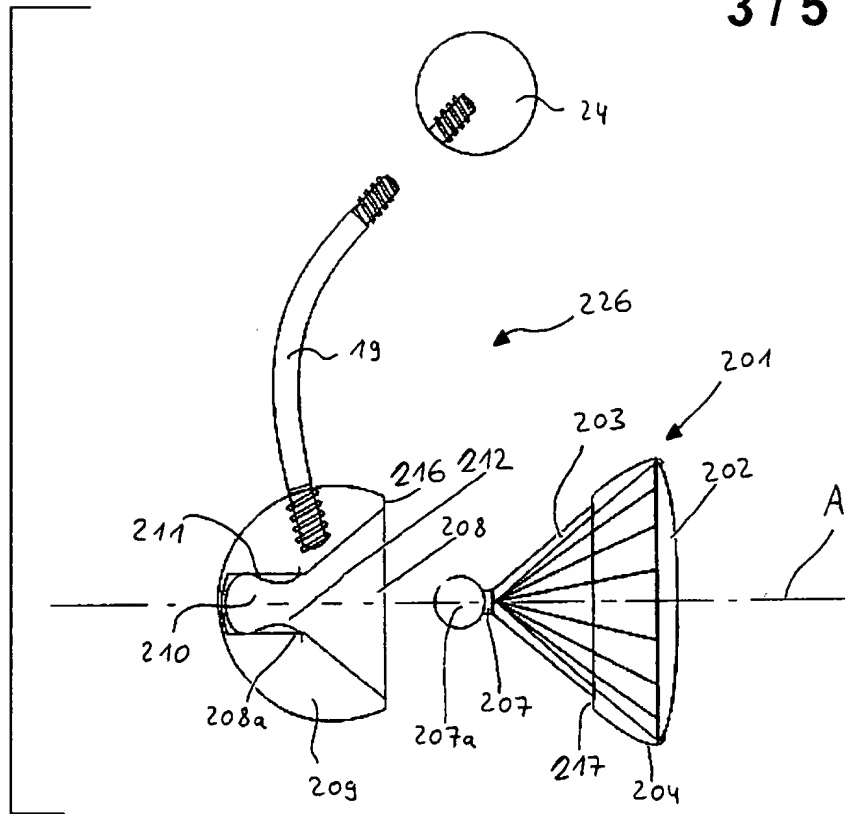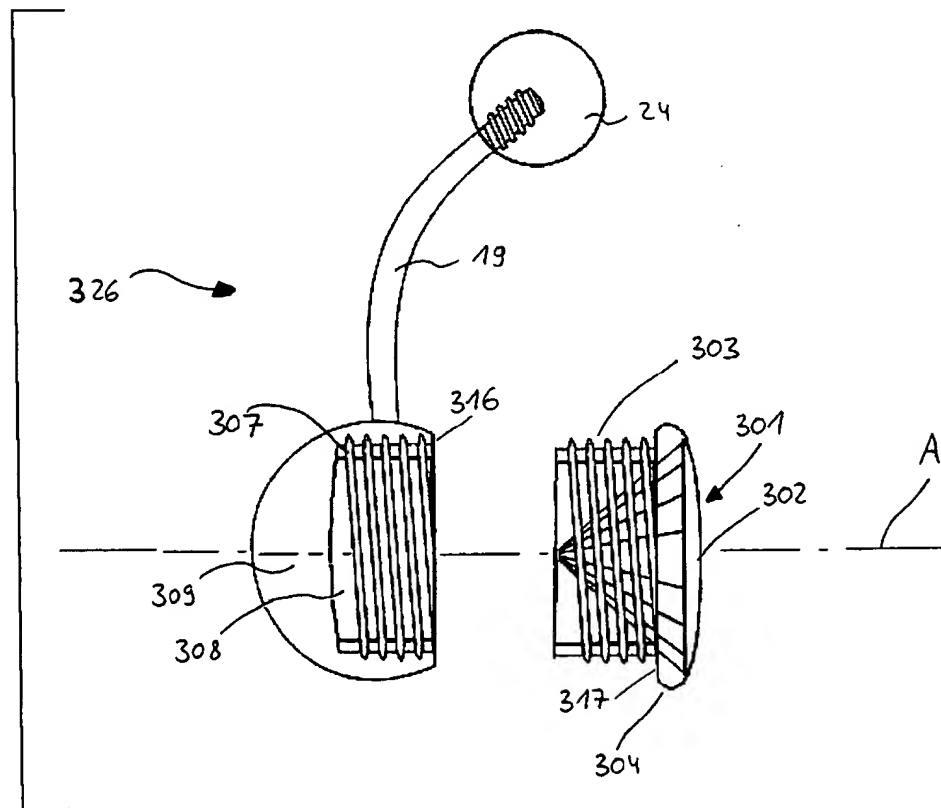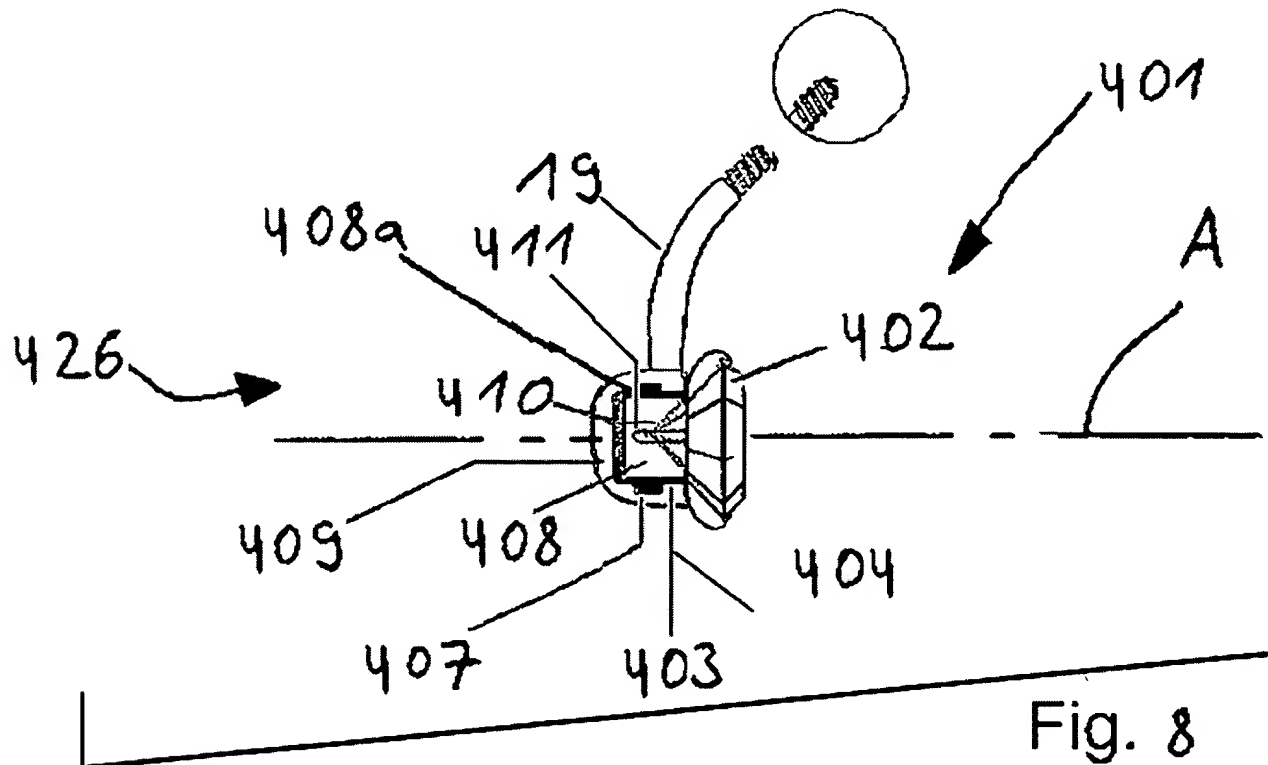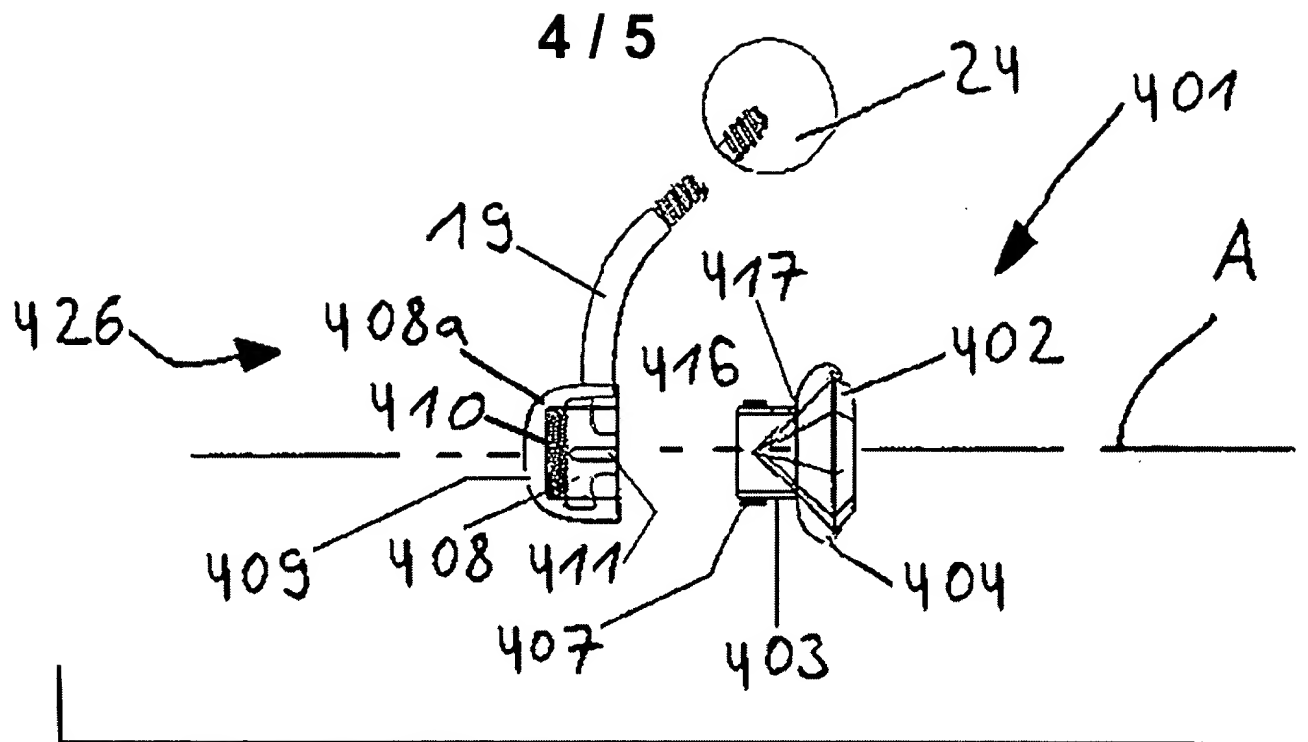Fig. 9

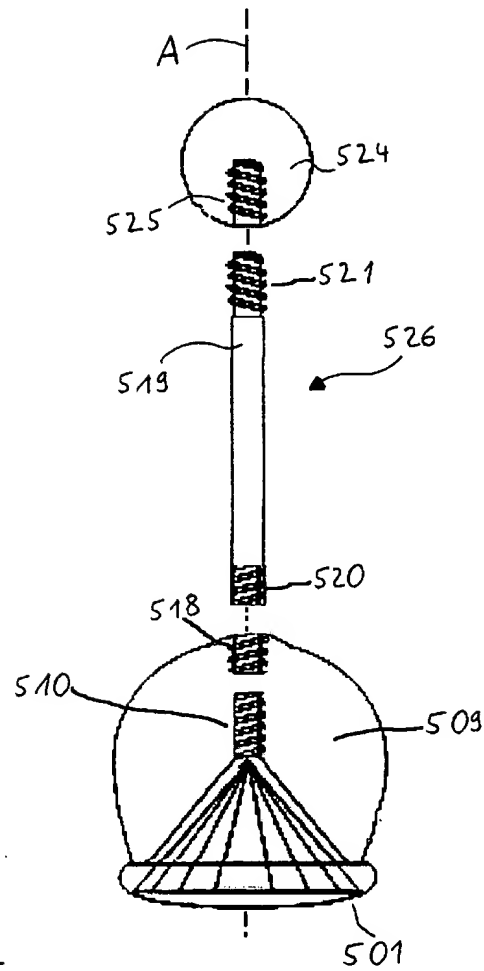


Fig. 10

